



Instruction includes methods of montage:

1) Rod - non-conductive (drop lead)

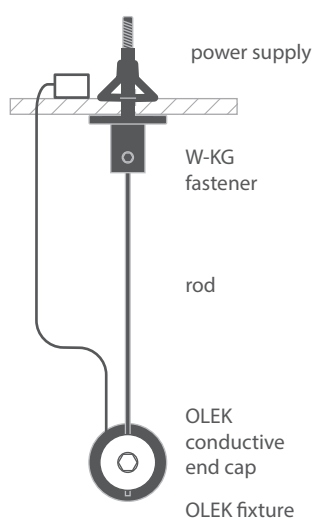

2) Rod - conductive driven power supply

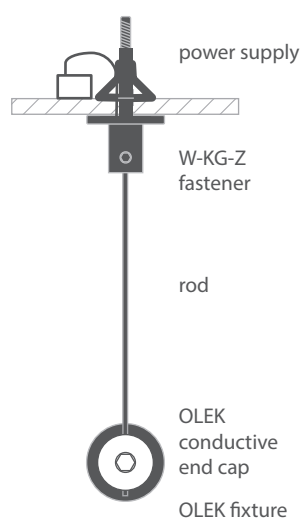

Tools needed for mounting:

- drill
- allen wrench
- soldering iron

WARNING! All LED strips should be connected to a 12 V or 24 V power supply.

IMPORTANT: The mounting instructions present the basic form of assembly. More methods and related accessories can be found at www.klusdesign.eu


OLEK - suspended fixture mounting instructions

1. Rod - non-conductive (requires drop lead)

*If fully built fixtures are ordered and received from KLUS please skip to #4

- 1.** Drill a hole in the extrusion to lead the powering cable.

cross-section




top view




- 2.** Mount the LED strip in the extrusion and lead the powering cable.


cross-section




bottom view

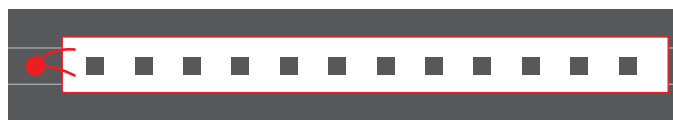


- 3.** Install the cover and both conductive end caps.

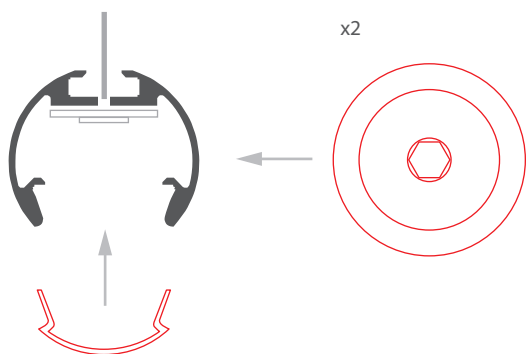


- 4.** Insert the rods into the holes in the head of the conductive end caps in tighten them with an allen wrench.

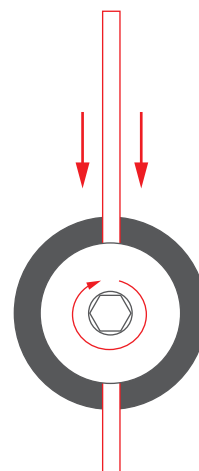

- 5.** Install the W-KG ceiling fasteners. The fastener installation manual can be downloaded at www.klusdesign.eu. Place the power supplier next to the fastener and drill the ceiling to lead the cable to it.

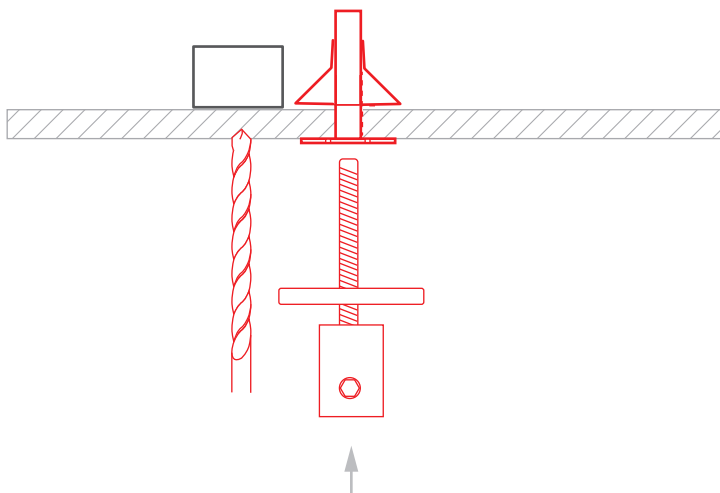


- 6.** Mount the fixture with rods into the ceiling fasteners. Connect the cable to the power supplier, leading it through a pre-drilled hole in the ceiling.

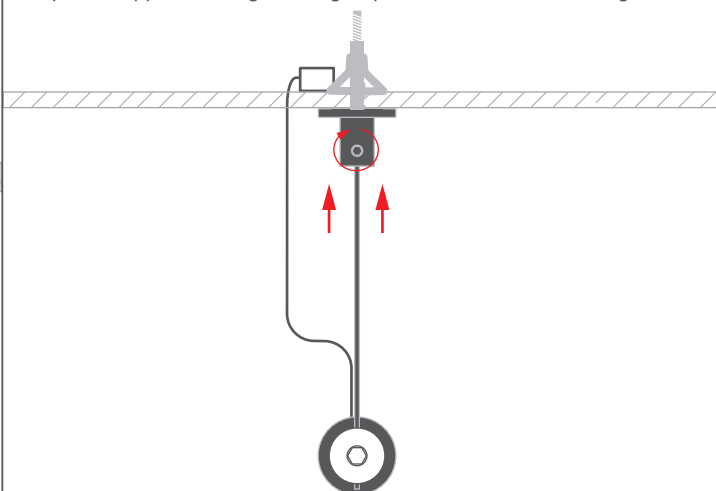


- 1.** Install the cover, LED and both the conductive end caps. The conductive plates inside the end caps must be soldered each to the separate pole on the LED strip.


cross-section

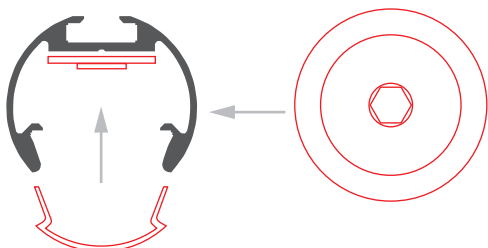


bottom view

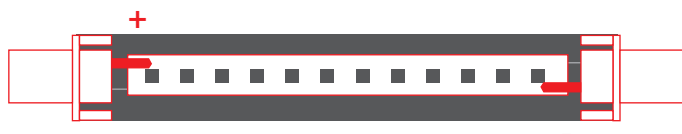

- 2.** Insert the rods into the holes in the head of the conductive end caps in tighten them with an allen wrench.

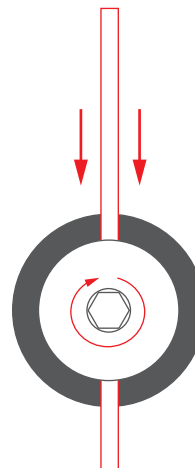

- 3.** Install the W-KG-Z ceiling fasteners. The fastener installation manual can be downloaded at www.klusdesign.eu. Connect the cables, each for the single power pole to the fasteners. The cables should go through a pre-drilled hole just under the masking cover of the fastener.

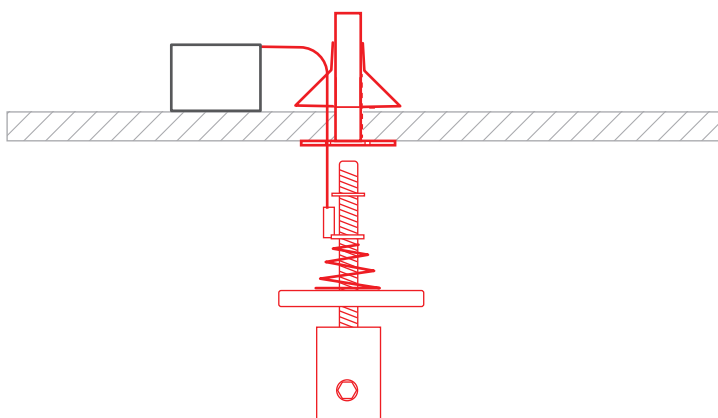

- 4.** Mount the fixture with rods into the ceiling fasteners. Mind that the power poles connected to the rods should match the ones connected to the end caps.

